

301H-01

Four Buttons Single Channel, Simple Type.

301H-1A (SAW)

301H-1A(s) (SAW+LC)



Key Specifications/Special Features:

Frequency range: 260 - 460MHZ
Size: 65 x 39 x 15mm
Elegant design
Voltage: DC12V GP-23A

Main Export Markets:

Main Export Markets:
Worldwide

Plastic Box Color:

Black
Walnut grain finish
Green metallic finish

Button's Color:

Orange
Blue
Dark Gray
Light Gray


Code Learning Transmitter Operation Instruction

With 301H-01, it is able to learn the codes from a fixed code R.F, transmitter (TX) covering the frequency range between 250MHz and 460MHz. Available for almost R.F. transmitter (TX) selling/used in the markets.

Step By pressing and holding the buttons of 301H-01 then pressing and holding **1:** the buttons of original transmitter, the LED bulb of 301H-01 blinking , solid on and goes off when code well learn from the original TX. The buttons pressing must be button 1 vis-a-vis button 1, button 2 vis-a-vis

button 2, ... until all buttons pressed.


Note :*If the code learning fail (LED bulb keep blinking when pressing the button), change the holding position of both transmitter to "side by side", or "back to back" or any position other than head to head*

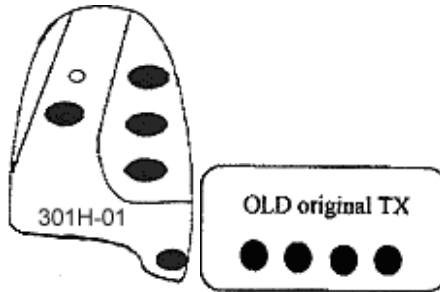

Step Check the frequency range of the OLD TX (original transmitter), Put the
2: old transmitter at TX zone of the digital frequency counter and press the
button of old TX. The digital screen of the frequency counter will show
the frequency of the old TX in figures.

Step Tune the frequency of the 301H-01 at the same as the original old TX-
3: (code learning completed)

Frequency Ranges of 301H-01

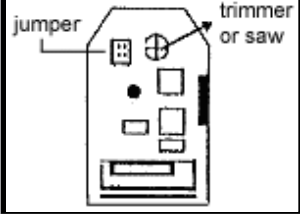Frequency Range	Jump Position	
250 to 380MHz	☐ :	
230 to 300MHz	: ☐	
270 to 450MHz	: :	

Remark:

1. To erase the codes out from 301H-01 Press 4 buttons at the same time, LED flashing 3 times and goes Off.
2. Code learning can only be effected when the 301H-01 is BLANK without code contained - LED light flashing
3. Do not operate all the procedures at the desk covered with metal plate.