


LCD MR062 (4 Digit)

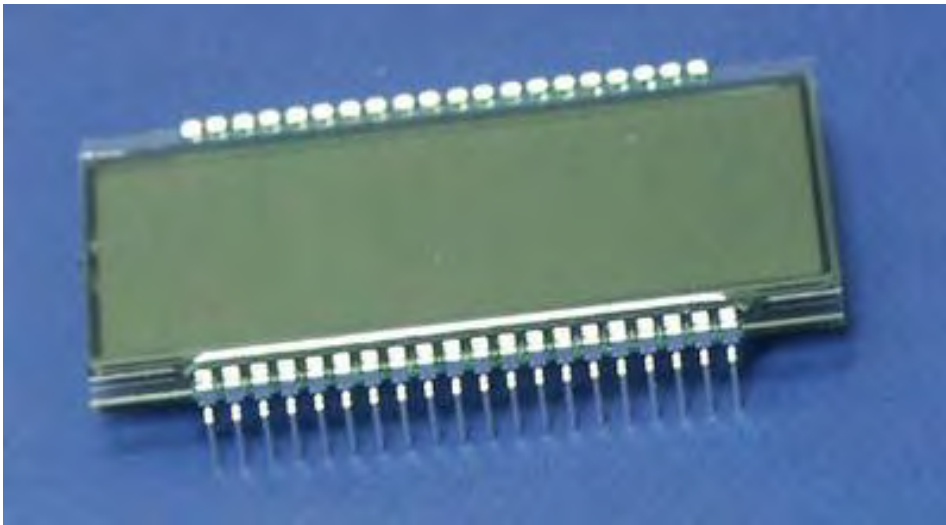

Display specification:

1. Duty: STATIC
2. Bias:
3. Operating voltage: 5.0V
4. Viewing angle: 6:00
5. Temperature:
 - Operating : -10 TO + 60°C
 - Storage: -20 To +70°C
6. Polarizer:
 - Top: Transmissive
 - Bottom: Reflective
7. End seal: LEFT
8. Pitch of pin: 2.54mm

PIN	1	2	3	4	5	6	7	8	9	10
COM	COM				E1	D1	C1	P1	E2	D2
PIN	11	12	13	14	15	16	17	18	19	20
COM	C2	P2	E3	D3	C3	P3	E4	D4	C4	B4
PIN	21	22	23	24	25	26	27	28	29	30
COM	A4	F4	C4	B3	A3	F3	G3	COL	B2	A2
PIN	31	32	33	34	35	36	37	38	39	40
COM	F2	G2		B1	A1	F1	G1			

Dimensions:

1. Length of top glass: 69.85±0.20mm
2. Width of top glass: 38.10±0.20mm
3. Length of bottom glass: 30.50±0.20mm
4. Thickness of LCD (max): 2.85mm
5. Thickness of glass:
 - Top: 1.10 mm
 - Bottom: 1.10 mm
6. Length of viewing area:

LCD M870 (4 digit)

- Horizontal : 63.00 mm
- Vertical: 24.00 mm

Made in Taiwan