






CP3.2-6

PHYSICAL SPECIFICATION

Nominal Voltage		6V	
Nominal Capacity (20HR)		3.2Ah	
Dimension	Length	135±1mm	(5.31 inches)
	Width	67±1mm	(2.64 inches)
	Container Height	61±1mm	(2.40 inches)
	Total Height	66±1mm	(2.60 inches)
Weight		Approx. 1.4 Kg (3.09lbs)	
Standard Terminal		Fasten Tab No.187E	








Dimensions(mm)
(tolerance+/-1mm)



F1(Fasten Tab No.187E)
Standard Terminal

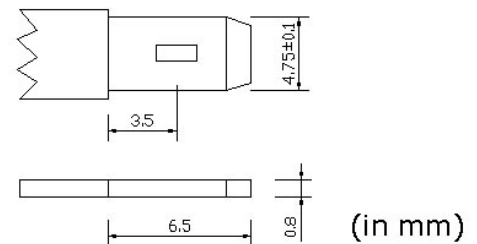


ELECTRICAL SPECIFICATION

Characteristics

Capacity	20 hour rate (0.16A)	3.2Ah
	10 hour rate (0.29A)	3Ah
	5 hour rate (0.54A)	2.8Ah
	3 hour rate (0.8A)	2.4Ah
	1hour rate (1.92A)	2Ah
Capacity affected by temperature	40°C (104 °F)	102%
	25°C (77 °F)	100%
	0°C (32 °F)	85%
Internal Resistance		Full charged battery (25°C, 77 °F) 50m Ω
Constant Voltage Charge	Cycle	Initial Charging Current less than 1A Voltage 14.4~15.0V at 25°C (77 °F) Temperature Coefficient -30mV/°C
	Standby	No limit on Initial Charging Current Voltage 13.5~13.8V at 25°C (77 °F) Temperature Coefficient -20mV/°C

Discharge curves @ 25°C (77 ° F)

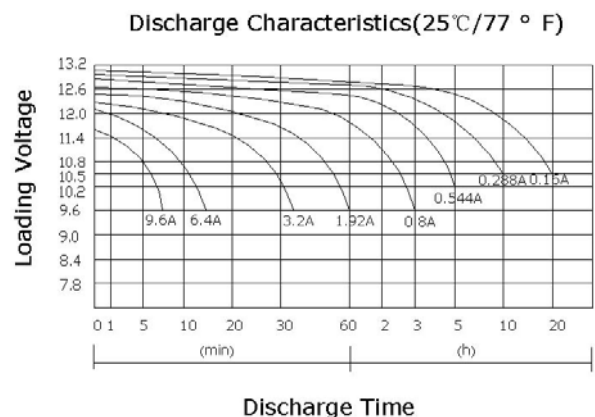

Made in China