


VISTA


CP4-6(3Ah)

PHYSICAL SPECIFICATION

Nominal Voltage Nominal Capacity (20HR)		6V 4Ah
Dimension	Length	70±1mm (2.76 inches)
	Width	47±1mm (1.85 inches)
	Container Height	100±1mm (3.94 inches)
	Total Height	105±1mm (4.13 inches)
Weight		Approx. 0.650Kg (1.434lbs)
Standard Terminal		Fasten Tab No.187E

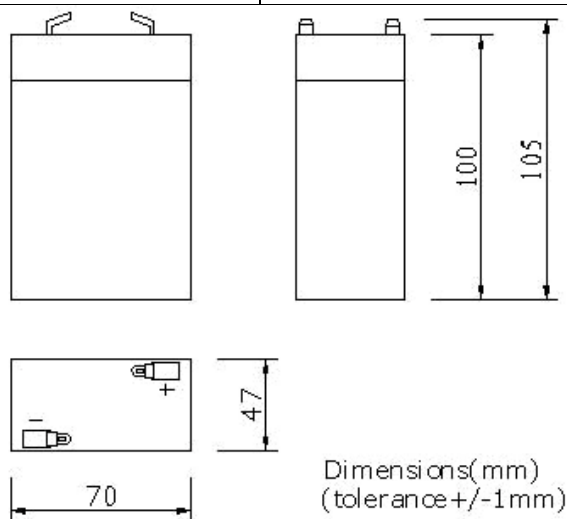

F1(Fasten Tab No.187E)
Standard Terminal

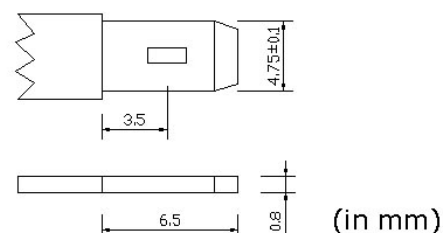

ELECTRICAL SPECIFICATION

Characteristics			Discharge curves @ 25°C (77 ° F)
Capacity	20 hour rate (0.2A)	4Ah	Discharge Characteristics(25°C/77 ° F)
	10 hour rate (0.36A)	3.8Ah	
	5 hour rate (0.68A)	3.4Ah	
	3 hour rate (1A)	3Ah	
	1hour rate (2.4A)	2.4Ah	
Capacity affected by temperature		40°C (104 °F) 102% 25°C (77 °F) 100% 0°C (32 °F) 85%	
Internal Resistance		Full charged battery (25°C,77 °F) 25mΩ	
Constant Voltage Charge	Cycle	Initial Charging Current less than 1.2A Voltage 7.20~7.50V at 25°C (77 °F) Temperature Coefficient -15mV/°C	
	Standby	No limit on Initial Charging Current Voltage 6.75~6.90V at 25°C (77 °F) Temperature Coefficient -10mV/°C	

Made in China