





CP10-6

PHYSICAL SPECIFICATION

Nominal Voltage		6V
Nominal Capacity (20HR)		10Ah
Dimension	Length	151±1mm (5.95 inches)
	Width	50±1mm (1.97 inches)
	Container Height	94±1mm (3.70 inches)
	Total Height	99±1mm (3.90 inches)
Weight		Approx. 1.53Kg (3.37lbs)
Standard Terminal		Fasten Tab No.187E

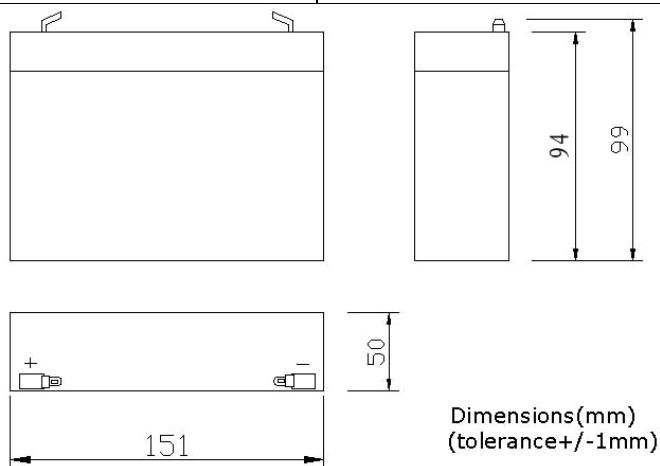

F1(Fasten Tab No.187E)
Standard Terminal

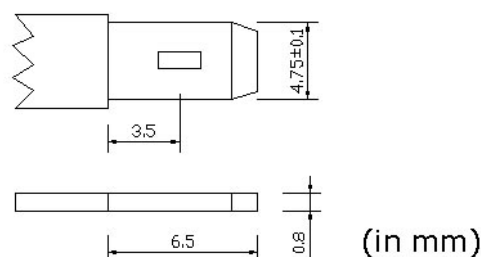


ELECTRICAL SPECIFICATION

Characteristics

Capacity	20 hour rate (0.5A)	10Ah
	10 hour rate (0.9A)	9.5Ah
Capacity affected by temperature	5 hour rate (1.7A)	8.5Ah
	3 hour rate (2.5A)	7.5Ah
	1hour rate (6A)	6Ah
Internal Resistance	40°C (104 °F)	102 %
	25°C (77 °F)	100 %
	0°C (32 °F)	85 %
Full charged battery (25°C, 77 °F) 10m Ω		
Constant Voltage Charge	Cycle	Initial Charging Current less than 3A Voltage 7.20~7.50V at 25°C (77 °F) Temperature Coefficient -15mV/°C
	Standby	No limit on Initial Charging Current Voltage 6.75~6.90V at 25°C (77 °F) Temperature Coefficient -10mV/°C

Discharge curves @ 25°C (77 ° F)

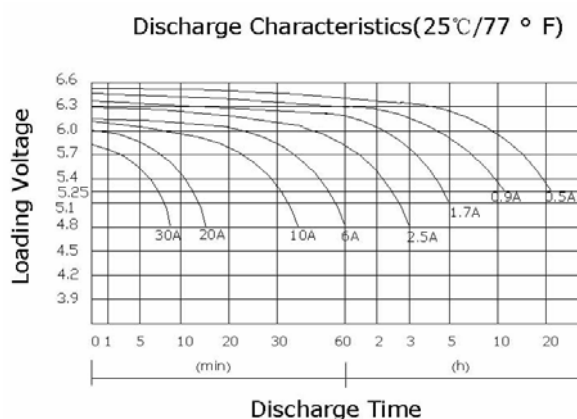

Made in China