
EMERGENCY:


MODEL	DESCRIPTION	DURATION	WEIGHT
AX/8/NM3	Standard 1x8 watt non maintained	3 Hours.	1.70 Kg.
AX/2x8/NM3	Standard 2x8 watt non maintained	3 Hours.	1.80 Kg.
AX/8/M3	Standard 1x8 watt maintained	3 Hours.	7.90 Kg.
AX/2x8/M3	Standard 2x8 watt maintained	3 Hours.	1.80 Kg.
AXD/8/NM3	Standard 1x8 watt non maintained/ dished diffuser diffuser	3 Hours.	2.0 Kg.
AXD/2x8/NM3	Standard 2x8 watt non maintained/ dished diffuser	3 Hours.	2.10 Kg.
AXD/8/M3	Standard 1x8 watt maintained/ dished diffuser	3 Hours.	2.30 Kg.
AXD/2x8/M3	Standard 2x8 watt maintained/ dished diffuser	3 Hours.	2.40 Kg.
AXG	Optional gasket for JP65		
AXL	Ledgend for AX (add suffix 1,2,3,4,&5)		
AXDL	Ledgend for AXD (add suffix 1,2,3,4,&5)		

EMERGENCY LIGHTING-SPACING GUIDE:

MOUNTING HT. (m)	LIGHT LEVEL	TRAN TO WALL	TRAN SPACING	AXIAL SPACING	AXIAL TO WALL
2.25	0.5	1.5	4.0	3.4	1.3
4.0	0.5	1.5	4.4	3.8	1.2
6.0	0.5	0.5	3.9	3.7	0.4

AX RANGE:

The AX range of self-contained luminaires is suitable for most applications. The unit has a clear polycarbonate diffuser and white body as standard.
The gear tray is ABS and a self legend is available for all models.
The AXD model has a dished clear diffuser for use as a single on double sided exit or directional sign

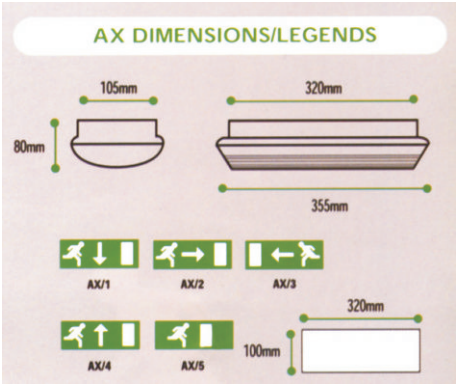

MADE IN U.K