


Phase detector Model: KS1

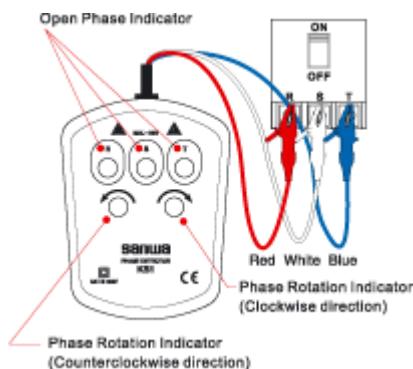

General Information

- Phase sequence and open phase check
- Large size alligator clips
- IEC61010 CAT. III 600V

General Specification:

Measurement:	Open phase and Rotating direction
Voltage range:	3 phase AC 100V ~ 600V
Frequency:	45Hz ~ 70Hz
Time limit:	AC110:Continuous, AC220V:3 hours, AC480V:12 minutes
Fuse:	0.2A/250V
Environment condition:	Altitude 2000m or below, pollution degree II
Operating temperature / humidity:	0°C~ 40°C, 80%RH max., no condensation
Standards:	IEC61010-1 CAT.III 600V, IEC61326, IEC61010-031
Dimensions:	Main unit 102(L) x 78(W) x 32.5(D) mm Alligator clips Approx. 0.6m (Red, White and Blue)
Weight:	Approx. 212 g (Alligator clips included)
Accessories:	Carrying pouch(C-KS) x 1, Instruction manual, Calibration Assurance card