



Stepper Motor + ULN2003 Driver Board

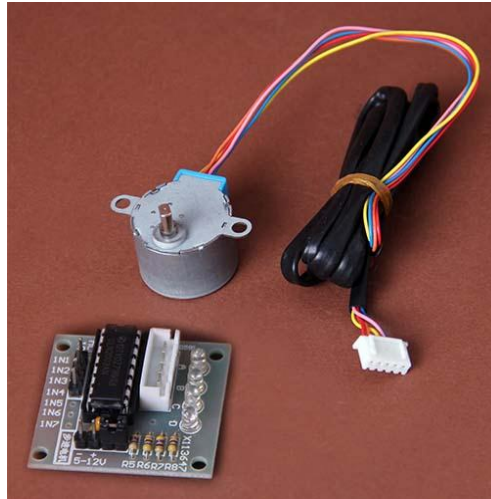

Specifications:

- Voltage: DC 5V – 12V
 - 5 Line 4 phases can be driven by ordinary uln2003 chip can also be connected in phase 2 development board used for Supporting the use of a direct plug and easy to use stepper motor used in the development board.
 - Stepper motor driver board with ULN2003.
 - A, B, C, D four-phase LED indicates the status of the stepper motor work.
 - Stepper motor with a standard interface, when used directly pluggable
 - Board Size: 3.2 × 3.5 cm.
 - Stepper motor Size: 4.2 x 1.9 cm
 - Reduction Ratio: 1/64
 - Step Torque Angle: 5.625°/64
- 

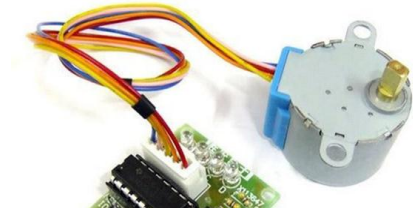

Circuit Diagram:

