




FINDER AC 24V

Model: 4052

Description:

- RELAY, PCB 5A DPCO 24VAC
- Coil Current:45mA
- Coil Resistance:320ohm
- Coil Voltage VAC Nom:24 VAC
- Contact Configuration: DPCO
- External Depth:12.4mm
- External Length / Height:25mm
- External Width:29mm
- SVHC: No SVHC (18-Jun-2010)
- Contact Current AC Max:8A
- Contact Voltage AC Max:250V
- Operating Temperature Max:85°C
- Temperature Operating Min:-40°C
- Approval Bodies: VDE, BEAB, UL, CSA, SEV, NF-USE, SETI, IMQ, SEMKO, DEMKO
- Approval Category: VDE, BEAB, UL, CSA, SEV, NF-USE, SETI, IMQ, SEMKO, DEMKO
- Coil Operating Lower Percent Limit:80%
- Coil Operating Upper Percent Limit:150%
- Contact Material: Silver Nickel
- Dielectric Voltage Contact to Contact:1000VAC
- PCB Hole Diameter:1.5mm
- Release Time:3ms
- Switch Current Max:8A

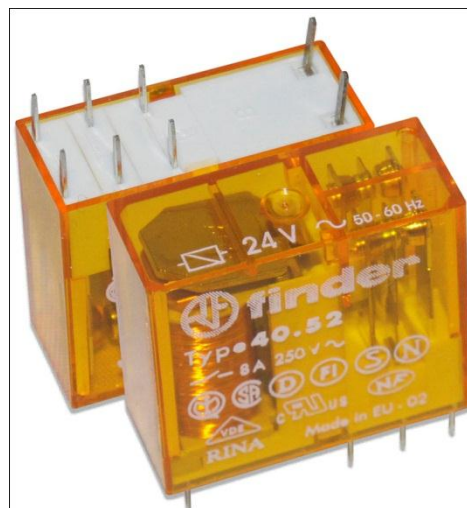

Made in Italy