


General-purpose Relay

Model:HH52P

General-purpose Relay

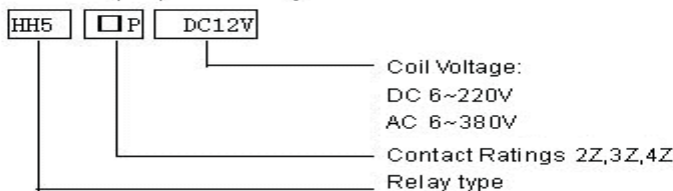

HH52P

Contact Ratings

Contact Ratings	2Z, 2D; 3Z, 3H, 3D	4Z, 4H, 4D
Contact Resistance	50m Ω 1A 6VDC)	
Contact Material	Silver Alloy	
Contact capacity	5A/250VAC 28VDC	3A, 5A/250VAC 28VDC

Specification

InsulationResistance	500M Ω 500VDC		
Dielectric Strength	BCC	1500V	1 min
	BOC	1000V	1 min
	COC	1500V	1 min
Operate Time	20ms/15ms		
Terminal Type	Socket		

Coil Versions





NominalVoltage VDC	Pull-in Voltage VDC	Release Voltage VDC	CoilResistance Ω: ±10%
5	4.8	0.50	30
6	4.8	0.60	40
12	9.6	1.20	160
24	19.2	2.40	640
48	38.4	4.80	2560
110	88.0	11.0	12100

Coil Versions

NominalVoltage VDC	Pull-in Voltage VDC	Release Voltage VDC	CoilResistance Ω: ±10%
6	4.80	1.80	12
12	9.60	3.60	42
24	19.2	7.20	168
48	38.4	14.4	675
110	96.0	36.0	3500
220/240	176.0	66.0	14000


Dimension.Bottom View

HH52P




Reference Data

最大切换功率 Max. Operating Power

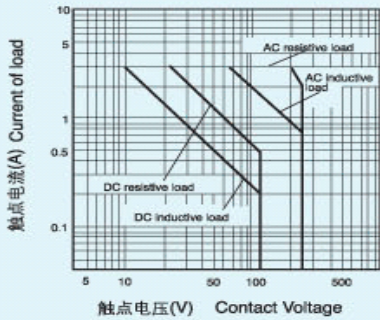

寿命曲线 Life Expectancy

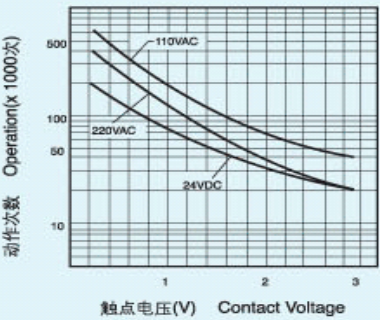

Made in china