

General-purpose Relay

Model:JQX-13F


Features

- Button Available
- 15A Transfer Contacts
- 1Z,2Z Contact operating form
- Various Terminals Available
- Various Sockets Available



JQX-13F 2Z

General-purpose Relay

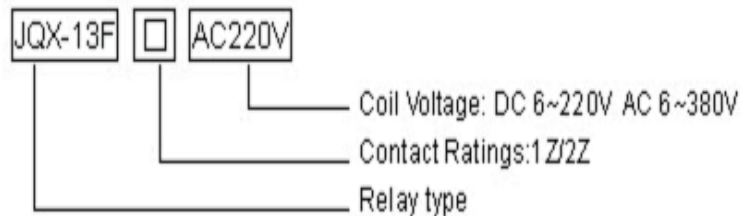

Contact Ratings

Contact Ratings	1Z,1H,1D	2Z
Contact Resistance	50mΩ(1A 6VDC)	
Contact Material	Silver Alloy	
Contact capacity	15A/250V 28VDC	10A/250VAC


Specification

Insulation Resistance	500MΩ,500VDC	
Dielectric Strength	BCC	1500V 1 min
	BOC	1000V 1 min
	COC	1500V 1 min
Operate Time	25ms/25ms	
Terminal Type	Socket	

Coil Versions

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω: ±10%	Nominal Voltage VAC	Pull-in Voltage VAC	Release Voltage VAC
5	4.8	0.50	30	6	4.80	1.80
6	4.8	0.60	40	12	9.60	3.60
12	9.6	1.20	160	24	19.2	7.20
24	19.2	2.40	640	48	38.4	14.4
48	38.4	4.80	2560	110	96.0	36.0
110	88.0	11.0	12100	220/240	176.0	66.0

Dimension.Bottom View

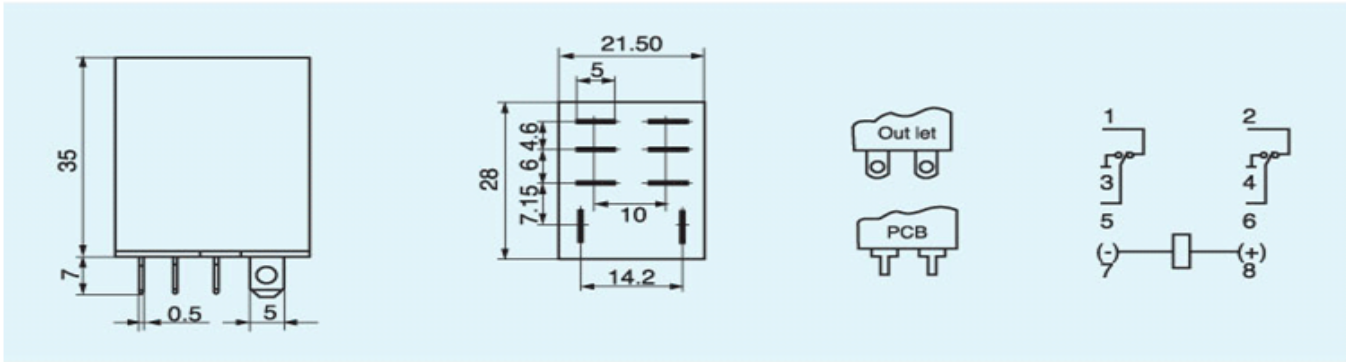

Reference Data



Made in china