

Power Relay Model:JQX-38F

Features

- With open type,dust-proof cover
- type
- With matched socket




JQX-38F



JQX-38F

Power Relay

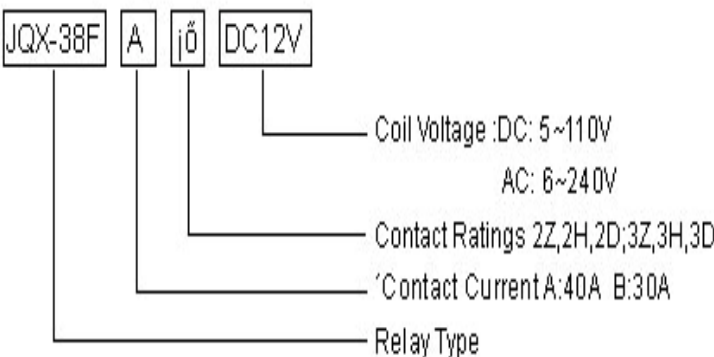

Contact Ratings

Contact Ratings	2Z,2H,2D	3Z,3H,3D
Contact Resistance	100m Ω (1A 6VDC)	
Contact Material	AgCdO	
Contact capacity	30A/40A 250VAC/30VDC	30A/40A 250VAC/30VDC

Specification

InsulationResistance	1000M Ω 500VDC
Dielectric Strength	BCC 2500V 1 min
	BOC 1200V min
Operate Time	25ms/15ms
Terminal Type	PCB


Coil Ratings

Nominal CoilPower	DC2W~2.5W AC4.5VA
-------------------	-------------------


Coil Versions

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	CoilResistance Ω : $\pm 10\%$	Nominal Voltage VAC	Pull-in Voltage VAC	Release Voltage VAC	CoilResistance Ω : $\pm 10\%$
12	8.40	1.20	57	12	9.60	3.60	10
24	16.8	2.40	230	24	19.2	7.20	40.3
48	33.6	4.80	2000	110	88.0	36.00	847
60	42.0	6.00	2850	220/240	176.0	72.00	3380

Dimension.Bottom View

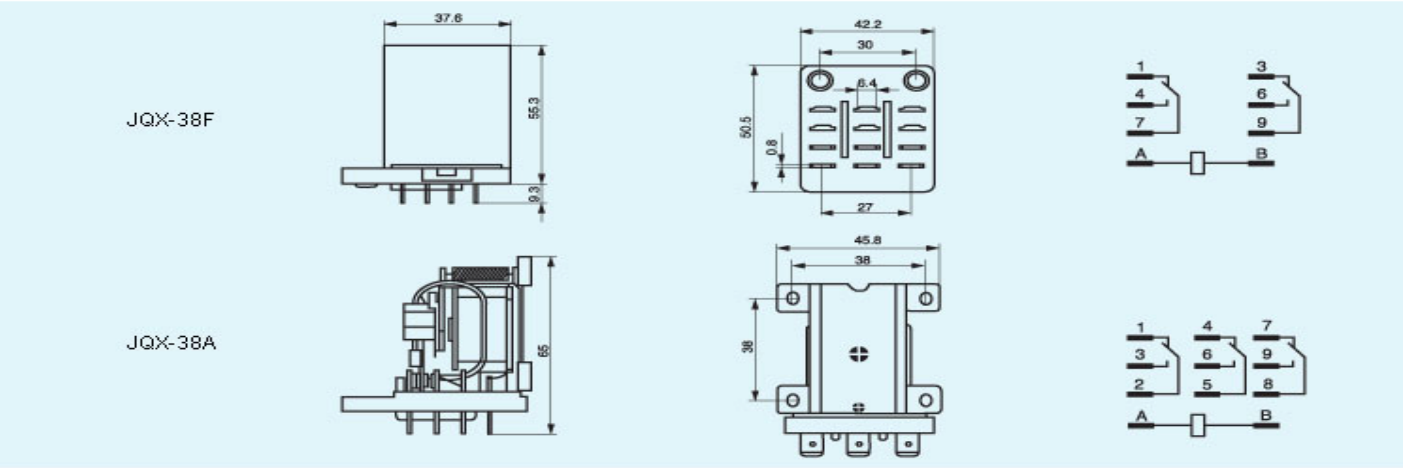

Reference Data

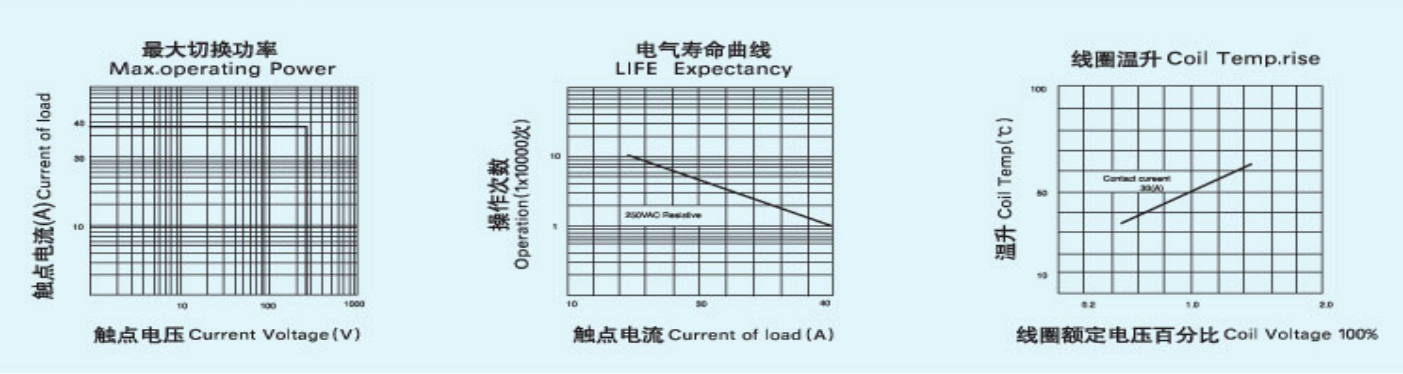

Made in china