

Power Relay Model:JQX-59F

Features

- 80 A Contact Change-over capacity
- Swift Connection
- Fashness of Guide Rail




JQX-59F 1Z



JQX-59F 1Z

Power Relay

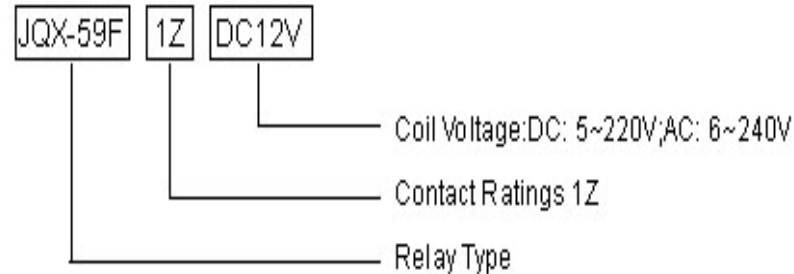

Contact Ratings

Contact Ratings	1Z,1H,1D
Contact Resistance	100m Ω (1A 6VDC)
Contact Material	AgCdO
Contact capacity	80A 250VAC/30VDC

Specification

Insulation Resistance	1000M Ω .500VDC
Dielectric Strength	BCC 2500V 1 min
	BOC 1200V 1 min
Operate Time	25ms/25ms
Terminal Type	Screw


Coil Ratings

Nominal Coil Power	DC: 3.6W AC: 4.4VA
--------------------	--------------------


Coil Versions

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω : $\pm 10\%$	Nominal Voltage VAC	Pull-in Voltage VAC	Release Voltage VAC	Coil Resistance Ω : $\pm 10\%$
6	4.80	0.60	10	6	4.80	1.80	8.27
12	9.60	1.20	40	12	9.60	3.60	32.7
24	19.2	2.40	160	24	19.20	7.20	130
48	38.4	4.80	640	48	38.40	14.4	523.6
60	48.0	6.00	2800	110	88.00	36.0	2750
110	88.0	11.0	9650	220/240	176.00	72.0	11000/13090

Dimension.Bottom View

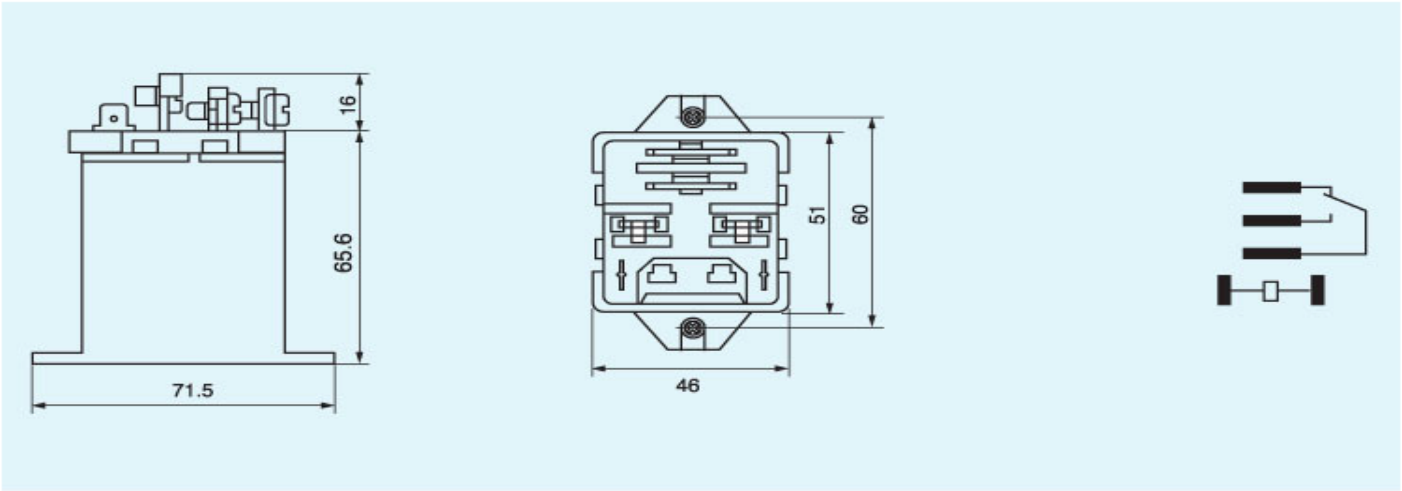

Reference Data

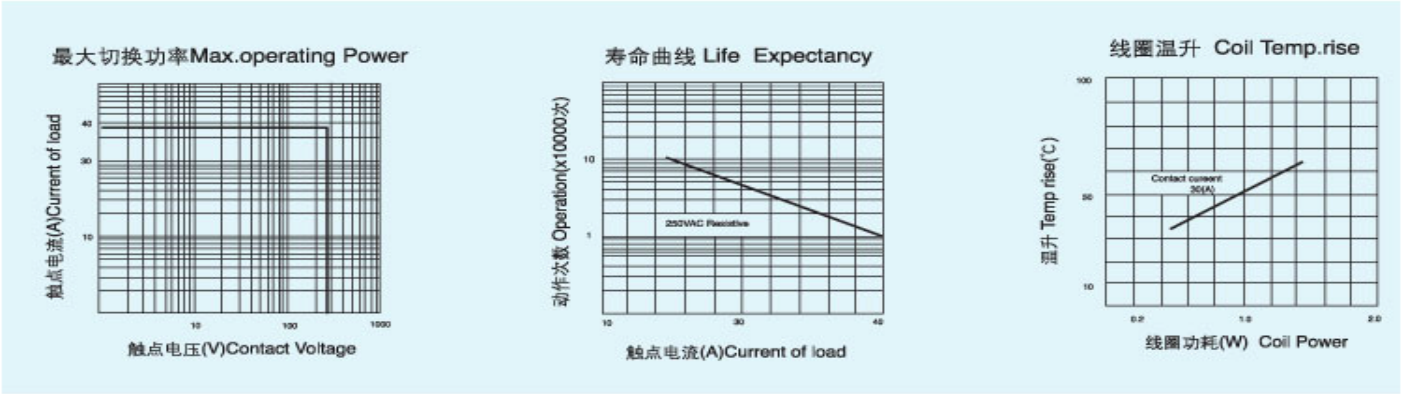

Made in china