

RELAY SOCKET




AS625



AS625

AMB






Specification

Rated load	Current / Voltage	A/VAC	10/300
Dielectric strength	Coil/Contact	V/S	4000
	Between contacts	V/S	2500
External connection wire		AWG/mm ²	20-14/0.5-2.5
Screw torque		Nm	0.8
Terminal protection degree			IP20

Matched relay

Socket model	Relay model	Metal Clip	Module	DIN clip
AS625	JQX-14FC/14FF 1Z	B-25C K-25C	AMB Series	
	JQX-14FL 1Z 10A	B-20L K-20L		
	JQX-115F 1Z 10A	B-15F K-15F		

Outline dimension, Wiring diagram

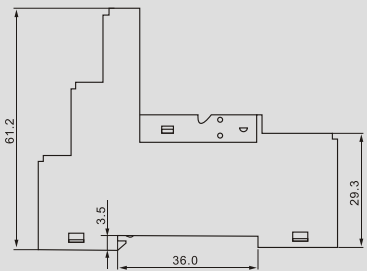

AS626



AS626

AMB



Specification

Rated load	Current / Voltage	A/VAC	10/300
Dielectric strength	Coil/Contact	V/S	4000
	Between contacts	V/S	2500
External connection wire		AWG/mm ²	20-14/0.5-2.5
Screw torque		Nm	0.8
Terminal protection degree			IP20

Matched relay

Socket model	Relay model	Metal Clip	Module	DIN clip
AS626	JQX-14FC/14FF 2Z	B-25C K-25C	AMB Series	
	JQX-14FL 2Z	B-20L K-20L		
	JQX-14FL 1Z 16A			
	JQX-115F 2Z	B-15F K-15F		
	JQX-115F 1Z 16A			

Outline dimension, Wiring diagram

