



Portable Type Desoldering Guns
TP-100/100AS
Handy for Working on the Move

Product Specifications

PRODUCT SPECIFICATIONS

Handy, portable type Desoldering Gun with combined temperature control circuit and desoldering mechanism.

Built-in powerful compact pump has a maximum vacuum of - 0.08Mpa. Stable temperature range from 250–450°C and a replaceable cartridge filter to make mounting and changing easy.



MODEL	TP-100	TP-100AS
Voltage	110–130V, 220–240V AC 50/60Hz	
Power Consumption	80W (110-130V), 70–75W (220-240V)	
Temperature Setting Range	250–450°C	
Temperature Control System	Sensor feed-back(ON-OFF control)	
Vacuum Pump System	Diaphragm system	
Insulation Resistance	Over 100MΩ(500V DC)	
Vacuum Degree Reached	- 0.08MPa (-600mmHg)	
Dimensions	225 5 170 mm (w/o cord bushing)	

Weight	470g (w/o cord, bushing)
Power Cord Length	1.5m (3 core cable)
Accessories	Cleaning pin TP-100 CP07 / Filter TP-100F

OPTION / REPLACEMENT PARTS


 Heater	TP-100/200H
 Filter	TP-100/200F
 Cartridge Set	TP-100/200K
 Heater Barrel	TP-100/200HP
 Cleaning Pin Vice	900-000

(The drill bit is not included.)


Drill Bit $\phi 0.7\text{mm}$, $\phi 0.9\text{mm}$

Drill Bit $\phi 1.4\text{mm}$, $\phi 2.4\text{mm}$


Replacement Nozzles




TP-100N-08



TP-100N-10




TP-100N-15




TP-100N-25


For te fly-back transformer



***TP-100N-S8**




***TP-100N-S1**

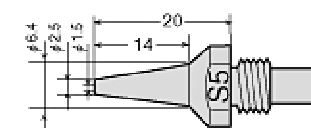

***TP-100N-S5**

 **Standard**

 *** Slim type**

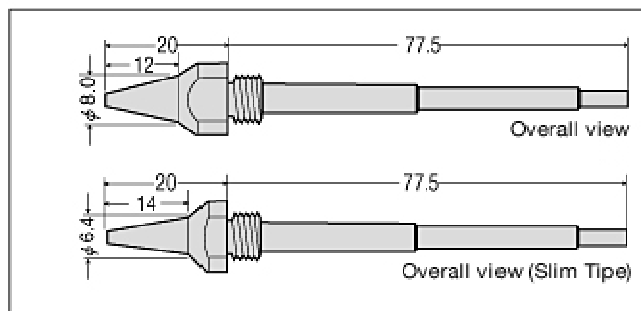

Made in Japan