
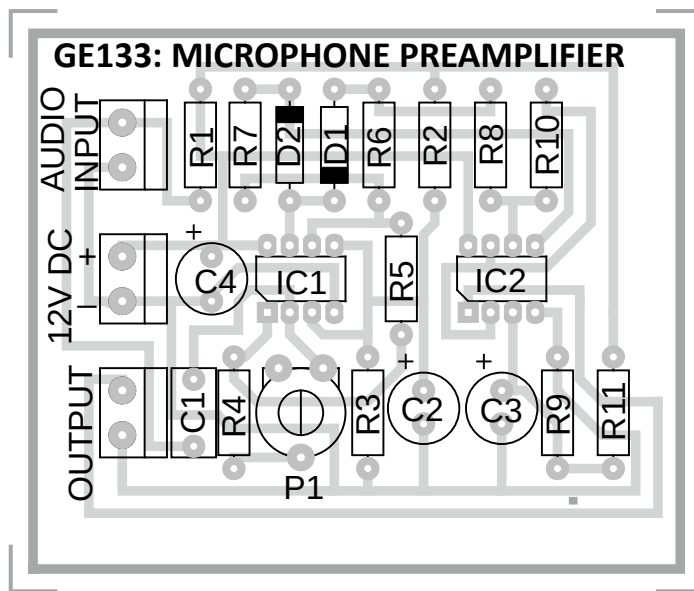


MICROPHONE PREAMPLIFIER

GE 133

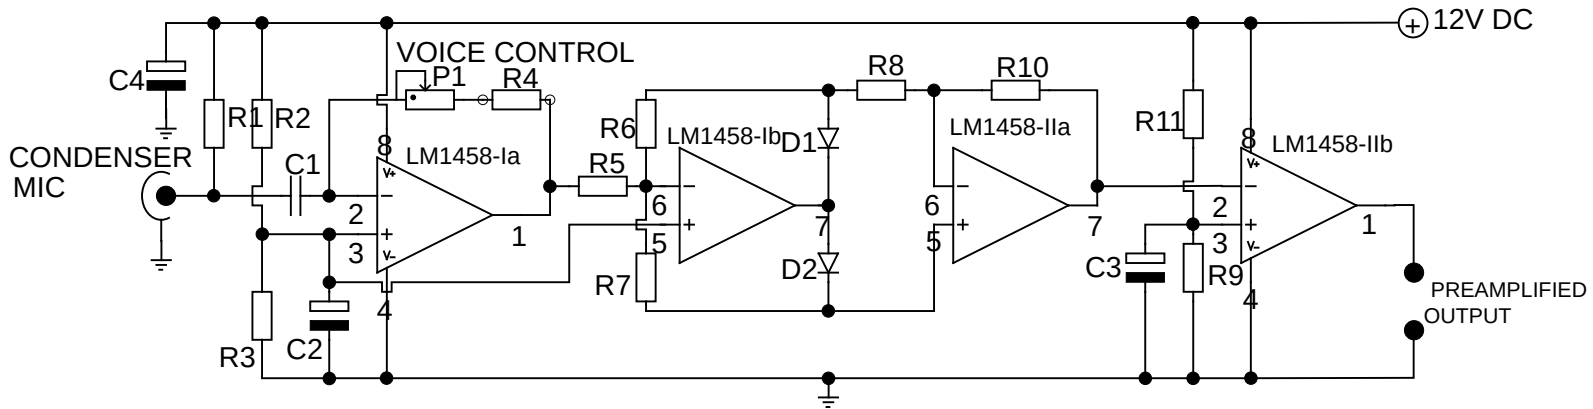

Bill of materials:

- * R1 : 10 KOhm (BROWN-BLACK-ORANGE)
- * R2-->R8: 47 KOhm (YELLOW-VIOLET-ORANGE)
- * R9 : 82 KOhm (GRAY-RED-ORANGE)
- * R10-R11: 47 KOhm (YELLOW-VIOLET-ORANGE)
- * P1 : 470 KOhm (POT VARIABLE RESISTANCE)
- * C1 : 100 nF/50V <104>(CERAMIC CAPACITOR)
- * C2-C3: 10 uF/25V (ELECTROLYTIC CAPACITOR)
- * C4 : 220 uF/25V (ELECTROLYTIC CAPACITOR)
- * D1-D2: 1N4148 (SIGNAL DIODE)
- * IC1-IC2: LM1458 (DUAL OPAMP)
- * IC SUPPORT (8 PINS-2 PIECES)
- * CONDENSER MICROPHONE
- * 2 SCREW JUNCTION (3 PIECES)