
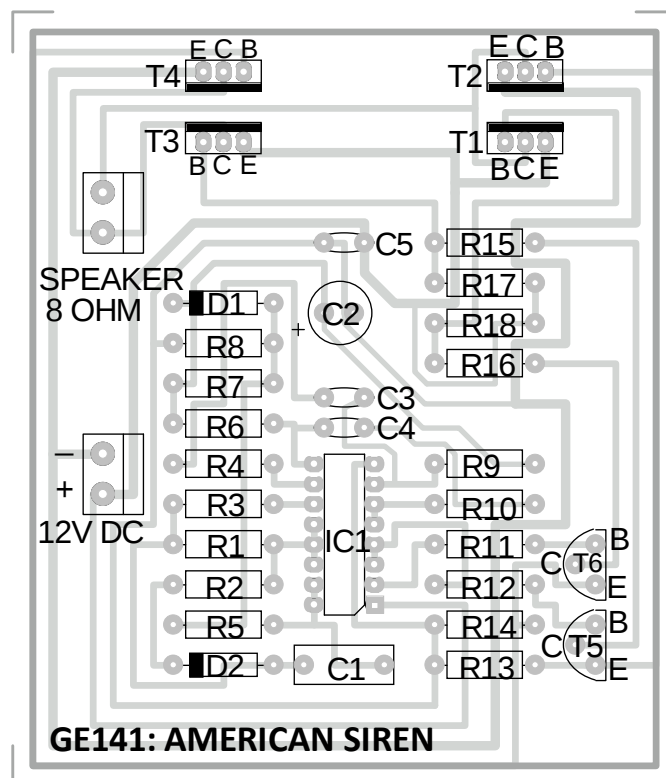


AMERICAN SIREN

GE 141

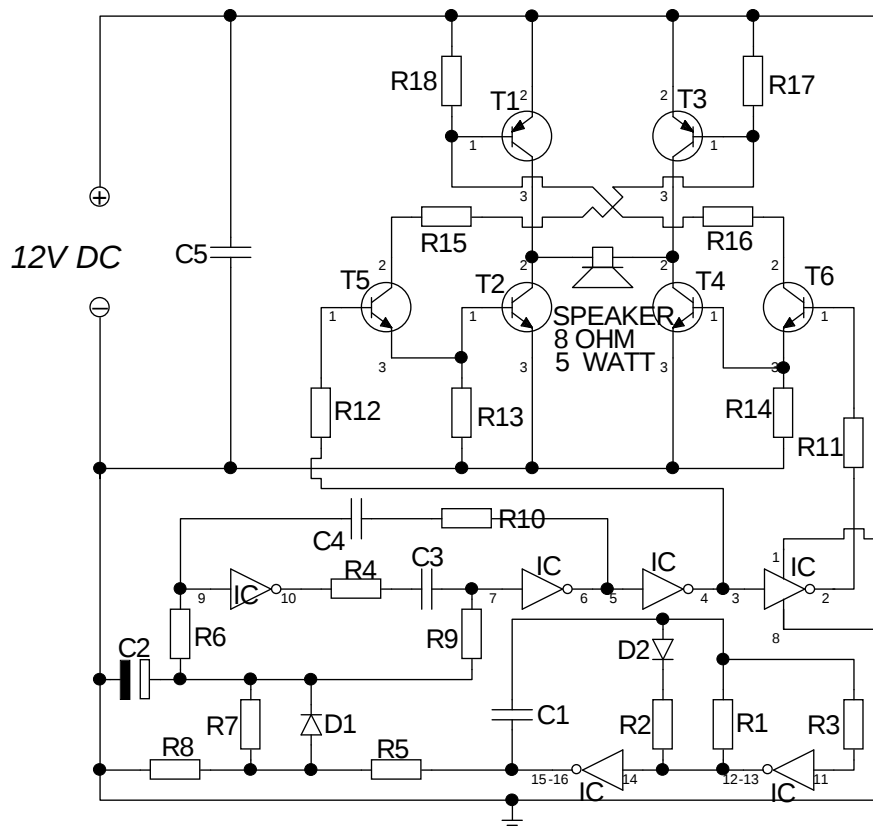

Bill of materials:

- * R1-R6-
R9 : 1 MOhm (BROWN-BLACK-GREEN)
 - * R2 : 220 KOhm (RED-RED-YELLOW)
 - * R3 : 820 KOhm (GRAY-RED-YELLOW)
 - * R5 : 2.2 KOhm (RED-RED-RED)
 - * R4-R10 : 10 KOhm (BROWN-BLACK-ORANGE)
 - * R7 : 22 KOhm (RED-RED-ORANGE)
 - * R8 : 4.7 KOhm (YELLOW-VIOLET-RED)
 - * R11-R12 : 3.3 KOhm (ORANGE-ORANGE-RED)
 - * R13-R14 : 2.2 KOhm (RED-RED-RED)
 - * R15-R16 : 100 Ohm (BROWN-BLACK-BROWN)
 - * R17-R18 : 2.2 KOhm (RED-RED-RED)
 - * C1 : 220 nF/50V <224>(CERAMIC CAPACITOR)
 - * C2 : 4.7 uF/25V (ELECTROLYTIC CAPACITOR)
 - * C3-C4 : 150 pF/50V <151>(CERAMIC CAPACITOR)
 - * C5 : 47 nF/50V <473>(CERAMIC CAPACITOR)
 - * D1-D2 : 1N4004 (DIODE)
 - * T1-T3 : BD244C (PNP TRANSISTORS)
 - * T2-T4 : 2SD331 (NPN TRANSISTORS)
 - * T5-T6 : 2SC945 (NPN TRANSISTORS)
 - * IC1 : CD4049 (HEX INVERTER)
 - * IC SUPPORT 16 PINS
 - * 2 SCREW JUNCTION (2 PIECES)
-