
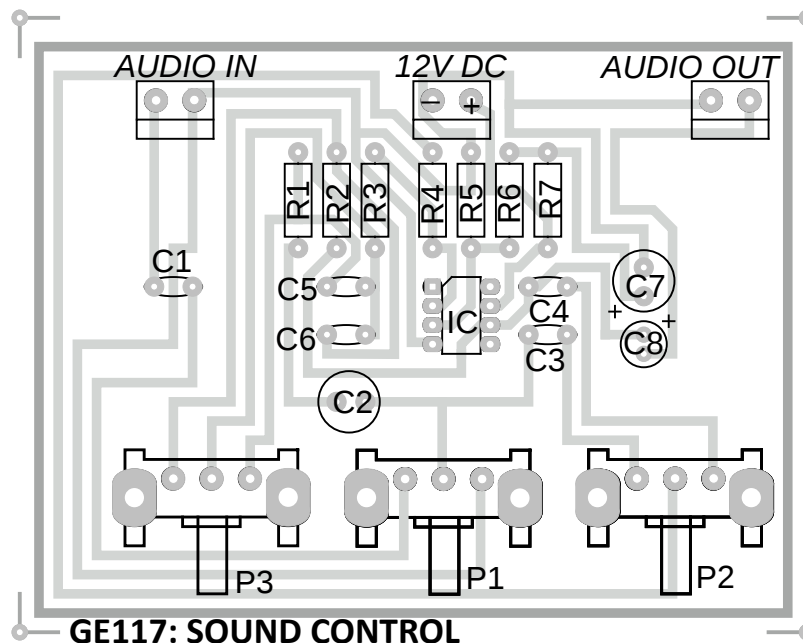


SOUND CONTROL

GE 117

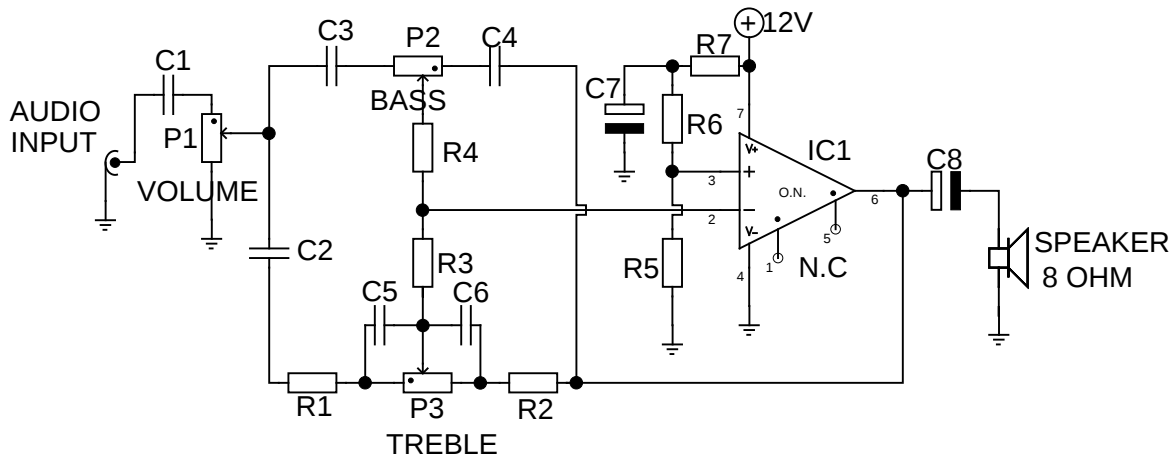

Bill of materials:

- | | |
|---|---|
| * R1-R2: 10 Kohm (BROWN-BLACK-ORANGE) | * C7: 100 uF/16V (ELECTROLYTIC CAPACITOR) |
| * R3 : 8.2 Kohm (GRAY-RED-RED) | * C8: 10 uF/50V (ELECTROLYTIC CAPACITOR) |
| * R4 : 4.7 Kohm (YELLOW-VIOLET-RED) | * IC1: LM 741 (OPERATIONAL AMPLIFIER) |
| * R5 : 65 Kohm (BLUE-GREEN-ORANGE) | * IC SUPPORT (8 PINS) |
| * R6 : 33 Kohm (ORANGE-ORANGE-ORANGE) | * 2 SCREW JUNCTION (3 PIECES) |
| * R7 : 2.2 Kohm (RED-RED-RED) | |
| * P1-->P3: 100 Kohm (ONBOARD VARIABLE RESISTANCE) | |
| * C1 : 330nF/50V <334> (CERAMIC CAPACITOR) | |
| * C2 : 1 uF/50V (NONPOLAR CAPACITOR) | |
| * C3-C4: 2.2nF/50V <222> (CERAMIC CAPACITOR) | |
| * C6-C5: 47nF/50V <473> (CERAMIC CAPACITOR) | |