

AMP CABINET 42U 60x60

Features:

- Reliable structure, static loading capacity:500KG (Optional castors and plinth)
- Adjustable feet and heavy duty castors are available simultaneously, moving conveniently and fixing reliably.
- Baying together easily, quickly, efficiently and firmly.
- Glass front door and rear metal door or high density vented front and rear doors, meeting the requirements of mechanical protection and ventilation.
- Optional cable entry on top cover and bottom panel Front, rear door and side panel can be removed facility, the bottom has the function of ventilation and rat-proof.
- Varies optional accessories, reliable quality.
- Optional opening hole and varies specification upon customers' special requirements.

8 heights - 12U, 17U, 22U, 27U, 32U, 37U, 42U, 47U

3 depth options - 600, 800 and 1000 mm

Flexible packing methods allows for convenient stocking and end user delivery.

Multiple sizes available.

Customization requests welcome

Standard and Material:

Comply with ANSI/EIA,RS-310-D;IEC297-

2;DIN41491:PART1;DIN41494:PART7;GB/T3047.2-92 standard and ETSI standard.

Surface Finish: Degreasing, pickling,phosphating,powder coating.


Material:SPCC cold rolled steel or EG steel

Thickness:Mounting profile:2.0mm,others:1.20mm to1.50mm

Color:Body color:RAL9004(black);RAL7004(grey)

Dimensions:

600x600x2055mm

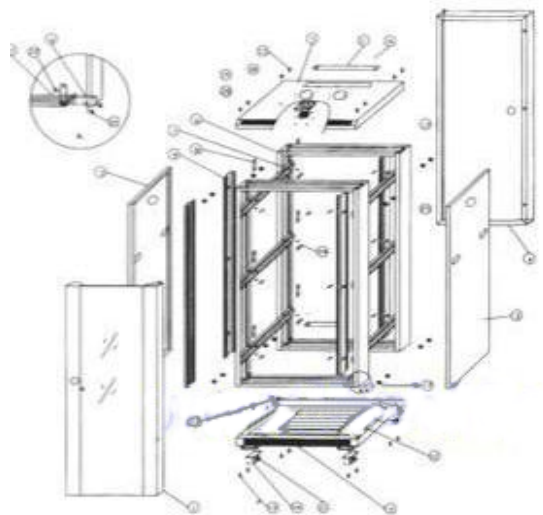

Made In China