




24-Port 10/100M Ethernet Switch

Model: TEH2400M

Description:

TEH2400M offers 24 10/100Mbps Auto-Negotiation ports. It offers an easy, economical, high-performance, standard solution for 100M network. With great flexibility, easy-to-use, convenient installation, and super performance, it is ideal choice for SMBs and SOHOs.

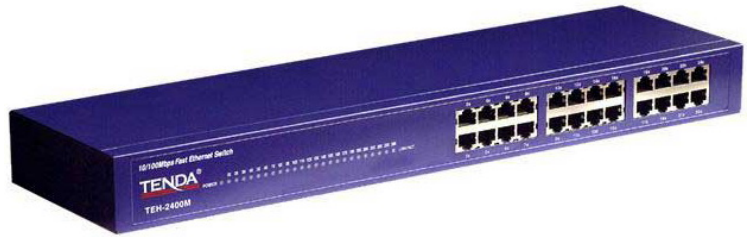

Features:

- Complies with IEEE802.3 10Base-T Ethernet, IEEE802.3u 100Base-TX Fast Ethernet standards
- 24 10/100Mbps Auto-Negotiation ports
- 8K MAC address auto learning and aging
- Support auto-diagnosis
- Support half-/full-duplex modes
- Dynamic buffer area automatically allocates to realize network load balancing and prevent the packing from losing
- Auto-examine all kinds of error frames to ensure data packing right.
- Internal Switch Power
- Standard 19-inch rack mountable metal case

Specifications:

Model	TEH2400M
Operating Conditions	Temperature: 0°C~40°C – Humidity: 50%~90% RH non condensing
Storage Conditions	Temperature: -40°C~70°C – Humidity: 10%~90% RH non condensing
CE	✓
Filtering Address Table	8k
Backplane Bandwidth	4.8Gbps
Network Media	10Base-T: Cat3 or 3e UTP; 100-Base-TX: Cat5 UTP
Standards And Protocols Supported	IEEE802.3, IEEE802.3u, IEEE802.3x
QA Certificate	✓
Warranty Card	✓
Language	Chinese, English
User Manual	✓
Input Voltage Range	AC160~264V, 50Hz/60Hz
Output Voltage Range	5V 3A
Power Consumption	15W
Dimensions	440(L) x 123(W) x 44(H) mm
Port	24 ports and 10/100Mbps per port
Transmission Media	10Base-T: Cat3 or 3e UTP; 100-Base-TX: Cat5 UTP
PV or Screen Printing	Tenda logo, product name, product description, LED indicators and port tags

Made in China